

TT1000-M-Inox-EB (Eurobin Tug) m020

The Eurobin Tug is the ergonomic solution for the safe and efficient transport of food containers conform DIN 9797 (also known as Eurobin). The Eurobin Tug is easy to use, powerful and compact allowing food containers to be transported by a single operator, even in confined spaces. By using the Eurobin Tug, it's also possible to transport multiple Eurobins by coupling them as a train.

Performance

The Eurobin Tug has been specially designed to transport eurobins according to DIN 9797. Thanks to its powered traction wheel, the operator's physical input is minimized. Equipped with 0,3 kW drive motor, the Eurobin Tug offers a highly cost-effective and productive solution for short and long distance transfers of loads up to 700 kg. Its compactness guarantees maximum manoeuvrability in confined spaces.

Comfort

The compact and exchangeable LiFePo4 batteries allow opportunity charging via the external charger at any convenient power point for optimum uptime. All controls are located on the ergonomic designed tiller head. The dual butterfly levers for drive control and the button for lifting function can be easily operated by either hand which ensures precise operation. The spring loaded hook makes connecting the machine extremely quick and easy.

Reliability

The durable drive unit of the Eurobin Tug delivers consistent high performance and reliability. The robust chassis has a reinforced super-structure for safe, efficient handling of euro bins up to 700 kg. The one touch control of the spring loaded hook ensures user friendliness and improves durability of the components.

Safety

The Eurobin Tug features an effective parking brake to hold the truck safely on slopes or on dock levellers. A robust stainless steel cover protects the drive unit and components, while the low profile chassis protects the operator's feet. A long, low mounted tiller arm places the operator at a safe yet comfortable working distance from the tug. The superstructure with the spring loaded lift ensures the stability while driving

Service

The DC drive motor optimizes uptime between routine service periods and reduces service costs, while a reliable, energy efficient controller delivers smooth handling performance.

STANDARD EQUIPMENT / OPTIONAL EQUIPMENT

STANDARD

- 4,5 km/h travel speed
- Automatic parking brake
- Drive wheel polyurethane
- Electromagnetic brake
- Emergency button
- Hygienic superstructure with spring loaded fork
- LiFePo4 exchangeable battery 24V, 20Ah
- Non marking solid rubber support wheels
- Safety reverse switch on tiller head

OPTIONAL

- Extra LiFePo4 exchangeable battery 24V, 36Ah



Features

Traction and lift system

- 0,3 kW DC drive motor;
- Adjustable parameters: travel speed up to 4,5 km/h & acceleration settings;
- Electrical height adjustment with snapping function;

Drive unit

- Sheetmetal components are made from stainless steel AISI 304L/316L;
- Robust stainless steel cover protects operators feet, drive system and components;
- Long tiller head support ensures the operator is at a safe yet comfortable distance from the tug;

Braking system

- Highly efficient electromagnetic brake applied by moving the tiller head to the fully upright position;
- Automatic braking on releasing traction switch or reversing direction;
- EuroBin Tug slows down before coming to a stop, remaining under total control at all times;
- Emergency button on tiller head;

Battery

- Exchangeable battery system ensures optimal running time;
- LiFePo4 battery technology with integrated Battery Management System;
- Average 8-hours drive time on single charge;
- Less than 4-hours charging time.

External charger

- Enables opportunity charging at any convenient power point;
- Easy plug connection and fast charging;

Controls & Display

- Traction and height adjustment controls grouped on ergonomic tiller head;
- Dual drive control levers for use with either hand;
- Safety reverse switch on tiller head stops the EuroBin Tug and briefly drives away from the operator when actuated;
- Reliable and precise battery indicator.

Superstructure

- Rugged, reinforced superstructure provides safe handling of loads up to 700 kg;
- Hygienic design for a perfect drainage and fast drying after cleaning;
- The fork is made from stainless steel AISI 316L.






TECHNICAL DATA TT1000-M-Inox-EB M020

According to VDI 2198

Characteristics	1.1	Manufacturer		Movexx International B.V.	
	1.2	Model designation		TT1000-M-Inox-EB	
	1.3	Power unit		Electric w. LiFePo4 battery	
	1.4	Operation type		Pedestrian	
	1.5*	Rated capacity	Q [t]	0,7	
	1.5.1	Load capacity at load centre	Q ₁ [t]	0.03	
	1.7**	Rated drawbar pull	F [N]	273	
	1.8	Load distance, center of drive axle to	x [mm]	565	
	1.9	Wheelbase	y [mm]	720,5	
Weight	2.1	Weight, incl battery	kg	160	
	2.2	Axle load with load	front/rear	kg	117/73
	2.3	Axle load without load	front/rear	kg	117/43
Wheels / tyres	3.1	Tyres R = rubber, PU = polyurethane		Non marking Solid Rubber/PU	
	3.2	Tyre size	front	mm	200
	3.3	Tyre size,	rear	mm	100
	3.5	Wheels, number front/rear (x = drive)			1x/2
	3.6	Tread width	front/rear	b ₁₀ /b ₁₁ [mm]	-/677
	Dimensions	4.9	Tiller height	min./max.	h ₁₄ [mm]
4.19		Total length		l ₁ [mm]	1128
4.20		Length to lift face		l ₂ [mm]	897
4.21		Total width		b ₁ [mm]	775
4.22		Fork dimensions		s/e/l	21-274-128
4.25		Fork spread		b ₅ [mm]	660
4.31		Ground clearance , front of machine		m ₁ [mm]	30
4.32		Ground clearance, center of wheel base		m ₂ [mm]	33
4.35		Turning radius		W _a [mm]	870
Performance	5.1	Travel speed forwards	with/without load	km/h	4/4,5
	5.1.1	Travel speed backwards	with/without load	km/h	3,5/4
	5.5	Max. drawbar pull (S2 = 60 Min)	with/without load	N	273
	5.6	Max. drawbar pull (S2 = 5 Min)	with/without load	N	545
	5.8	Maximum slope (5 min)	with/without load	%	0/15
	5.9	Acceleration	with/without load	s	11/10
	5.10	Service brake			Electromagnetic
Drive	6.1	Drive motor output (S2 = 60 Min)		kW	0,3
	6.4	Battery voltage, nominal capacity		[V/Ah]	24/20
	6.5	Battery weight +/- 5%		kg	8.4
Other	8.1	Drive control			DC
	10.7	Noise level		dB(A)	< 65

* The maximum payload is affected by the type of slope, operating time and floor type. See the graphic below for an indication of the allowable slope to load ratio (depending on slope surface/wheel type/machine weight).

** The maximum drawbar load on the hook [N] is determined by the engine power of the machine but is affected by the type of wheels of the machine and of the towed trolley/load, the type of surface and the driveable weight of the machine.

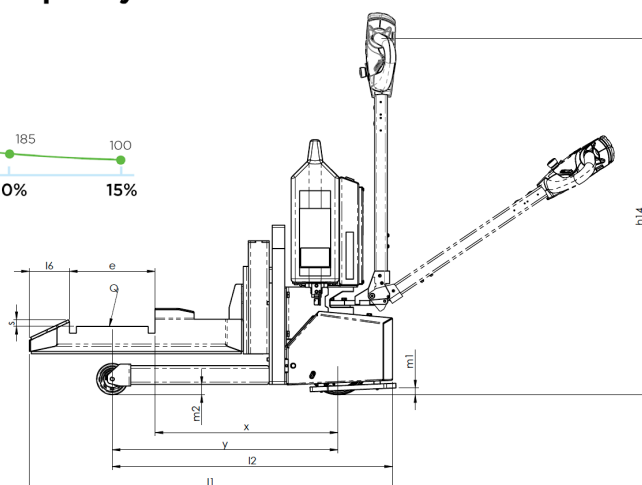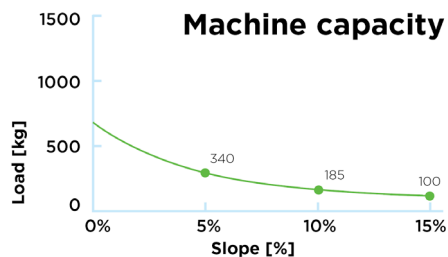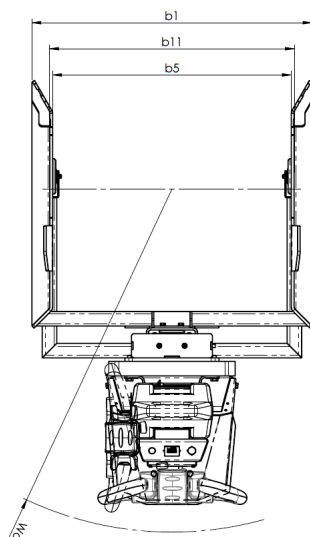



Movexx International BV. reserves the right to make adjustments to this publication at any time, without notice or obligation. Data in this publication are for reference use only. It is the responsibility of the reader of this information to verify any and all information presented herein. All Images of products shown in this document are indicative only. The actual products may differ from the displayed image. No rights can therefore be derived from the images shown. For more information contact us at info@movexx.com.

movexx
smart electric tugs

Generatorstraat 17-19
3903 LH Veenendaal
The Netherlands

T +31 (0)318 5199 00
E info@movexx.com
I www.movexx.com